



VENTURE
LIGHTING

UNI-FORM
PULSE START METAL HALIDE LIGHTING SYSTEMS

MH-DE 1500W/T7/4K

GENERAL Characteristics

Lamp Type	Double Ended Metal Halide
ANSI Code	-
Bulb Shape	T20 (T7 USA)
Base Type	RSC (Rx7s)
Bulb Finish	Clear
Rated Life	3000 hours
Operating Position	Horizontal $\pm 15^\circ$

ELECTRICAL

Lamp Watts	1500
Lamp Oper. Voltage (Nom.)	500


NOTES

PHOTOMETRIC

Initial Lumens	150000
Scotopic Lumens (S/P 1.7)	255000
Lamp Lumen Depreciation (LLD)	.65 (65%) @ 1950 hours
Correlated Color Temperature	4000K
Chromaticity Coordinates (CIE-x,y)	.385 .390
Color Rendering Index (CRI)	65

PHYSICAL

Bulb Diameter	22 mm
Max. Overall Length (MOL)	256 mm
Light Center Length (LCL)	N/A
Effective Arc Length	170.5 mm
Max. Base Temperature ($^\circ\text{C}$)	350
Max. Bulb Temperature ($^\circ\text{C}$)	850
Socket Pulse Rating (KV)	2.5
Luminaire Type	Enclosed Rated



HOR $\pm 15^\circ$
Horizontal



T20



Dia. = 22 mm
MOL = 256 mm
LCL = N/A
Base = RSC (Rx7s)

**Advanced Lighting Technologies
Australia, Inc.
+61 03 9800 5600**

Fax: +61 03 9800 5533
110 Lewis Road
Wantirna South
Victoria 3152, AUSTRALIA
E-mail: sales@adlt.com.au
www.adlt.com.au

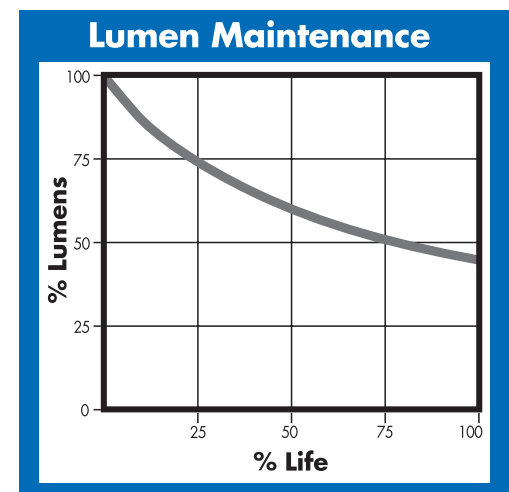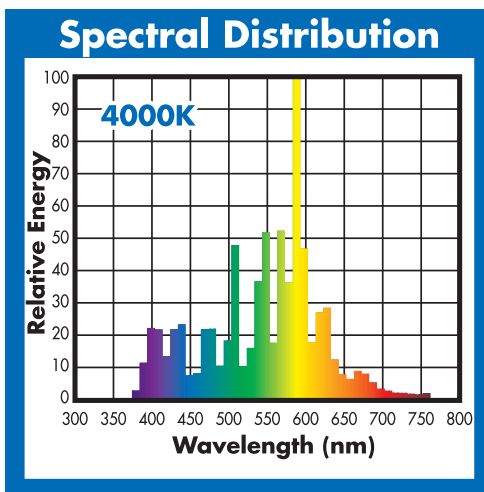

COMPLIES WITH (CE), LOW VOLTAGE (CE), WEEE AND RoHS DIRECTIVES.
THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30

Warning: This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.