


High Pressure Sodium Lamps

Description: HPS-DE 70W/RX7S/HO


Performance Data

Rated Light Output (Lumens @ 100 hours)	6300
Lamp Lumens per Watt	90
Rated Life (Hrs @ 10Hr./Start)	28000+
Correlated Colour Temperature (K)	2000
Chromaticity (CIE - X Y)	540,420
Colour Rendering Index (CRI) or (Ra)	25
Typical Warm Up Time (Minutes)	5
Typical Hot Restart Time (Minutes)	1
Burning Position	Universal
Energy Rating (ErP)	A+ 77 kWh/1000h



Physical Data


Base Designation	RX7s
Bulb Diameter (mm)	20
Max. Overall Length (mm)	114
Light Centre Length (mm)	57
Effective Arc Length (mm)	34.8
Max. Base Temperature (°C)	210
Max. Bulb Temperature (°C)	400
Luminaire Type	Open/Enclosed
Socket Pulse Rating (KV)	2.8
Mercury Content (mg)	3.75

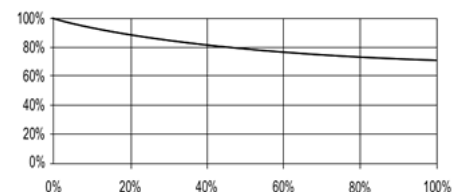

Lumen Maintenance (Light Output vs. Rated Life)

Lamp Electrical Data

Nominal Lamp Wattage (W)	70
Lamp Operating Voltage (V)	90
Lamp Operating Current (A)	1.0
Min. Open Circuit Voltage (RMS)	198
Min. Starting Pulse (Peak V)	1800-2300
Min. Pulse Width (Microseconds)	1 @2700V
Min. Pulse Rate Per ½ cycle	1
Pulse Position (Electrical Degrees)	60-90, 240-270

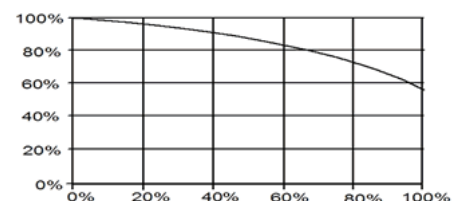

Lamp Mortality (Survivors vs. Rated Life)

Revision: 18-06-2012

See page 2 for product notes

High Pressure Sodium Lamps

Notes:

This Product Specification contains data about typical performance at nominal power. Actual values may depend on ballast and applications. Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives.