

High Pressure Sodium Lamps

Description: HPSE.70W/E27

Performance Data


Rated Light Output (Lumens @ 100 hours)	5300
Lamp Lumens per Watt	75
Rated Life (Hrs @ 10Hr./Start)	28000+
Correlated Colour Temperature (K)	2000
Chromaticity (CIE - X Y)	540,420
Colour Rendering Index (CRI) or (Ra)	25
Typical Warm Up Time (Minutes)	5
Typical Hot Restart Time (Minutes)	1
Burning Position	Universal
Energy Rating (ErP)	A 77 kWh/1000h

Physical Data


Base Designation	E27
Bulb Designation	E70
Bulb Diameter (mm)	72
Max. Overall Length (mm)	156
Max. Base Temperature (°C)	210
Max. Bulb Temperature (°C)	400
Luminaire Type	Open/Enclosed
Socket Pulse Rating (KV)	2.8
Mercury Content (mg)	3.75

Lamp Electrical Data

Nominal Lamp Wattage (W)	70
Lamp Operating Voltage (V)	90
Lamp Operating Current (A)	1.0
Min. Open Circuit Voltage (RMS)	198
Min. Starting Pulse (Peak V)	1800-2300
Min. Pulse Width (Microseconds)	1 @2700V
Min. Pulse Rate Per ½ cycle	1
Pulse Position (Electrical Degrees)	60-90, 240-270

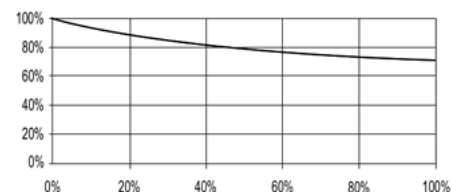

Lumen Maintenance (Light Output vs. Rated Life)

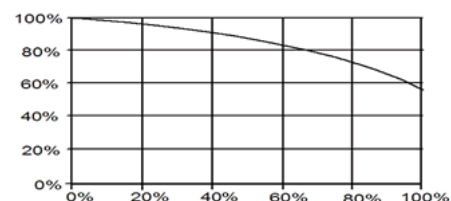

Lamp Mortality (Survivors vs. Rated Life)

Revision: 28-02-2012

See page 2 for product notes

High Pressure Sodium Lamps

Notes:

Standard high pressure sodium lamps are suitable for use outside the EU

This Product Specification contains data about typical performance at nominal power. Actual values may depend on ballast and applications. Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives.