

400 Watt Pulse Start Lamp

28614 DATA SHEET



UNI-FORM
PULSE START METAL HALIDE LIGHTING SYSTEMS

MH 400W/U/PS/740

GENERAL Characteristics

Lamp Type	MH Pulse Start Single Ended
ANSI Code	M135, M155/E
Bulb Shape	ED37
Base Type	Mogul (E39)
Bulb Finish	Clear
Rated Life (V)	30000 hours
Rated Life (H)	22500 hours
Operating Position	Universal
Dimming	50% Rated Power

PHOTOMETRIC

Initial Lumens (V)	44000
Initial Lumens (H)	39600
Lamp Lumen Depreciation (LLD)	.86 (86%) @ 8000 hours
Correlated Color Temperature	4000K
Chromaticity Coordinates (CIE-x,y)	.385 .390
Color Rendering Index (CRI)	68

PHYSICAL

Bulb Diameter	4.6" (120mm)
Max. Overall Length (MOL)	11.5" (292mm)
Light Center Length (LCL)	7.0" (178mm)
Effective Arc Length	37.2mm
Max. Base Temperature (°C)	210
Max. Bulb Temperature (°C)	400
Socket Pulse Rating (KV)	4
Luminaire Type	Enclosed Rated

ELECTRICAL



Lamp Watts	400
Lamp Oper. Voltage (Nom.)	135

SUSTAINABILITY



Recycling Program	Smartpac® 800-451-2606
Picograms Hg per Mean Lumen Hour	37
MR-Credit 4 Reduced Mercury in Lamps	1 LEED point
EISA 2007 Compliant	Yes

NOTES

Lamp performance ratings published in this data sheet are based upon operation with approved electronic ballasts. Operation of position-rated lamps outside of their tolerances will result in poor performance. Nominal color temperature rating is based on vertical ($\pm 15^\circ$) operation of the lamp. Off vertical positions will result in higher color temperature. Minimum Starting Temperature: $-40^\circ\text{C}/^\circ\text{F}$.



ED37
Dia. = 4.6" (120mm)
MOL = 11.5" (292mm)
LCL = 7.0" (178mm)
Base = Mogul (E39)

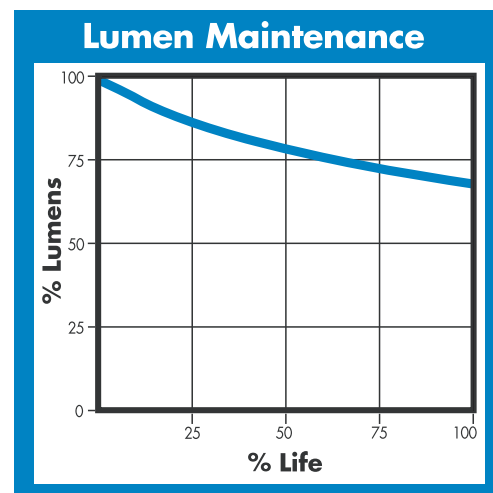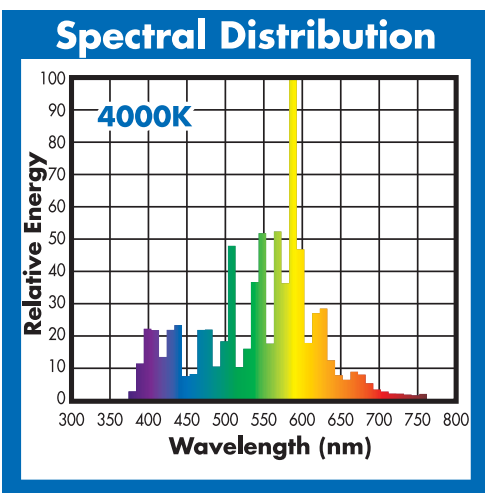

**(800) 451-2606
or (440) 248-3510**

Fax: (800) 451-2605
7905 Cochran Road
Glenwillow, Ohio 44139 USA
E-mail: venture@adlt.com
VentureLighting.com

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30

Warning: This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.

This Product is Recyclable Through  Smartpac
RECYCLING SERVICE